
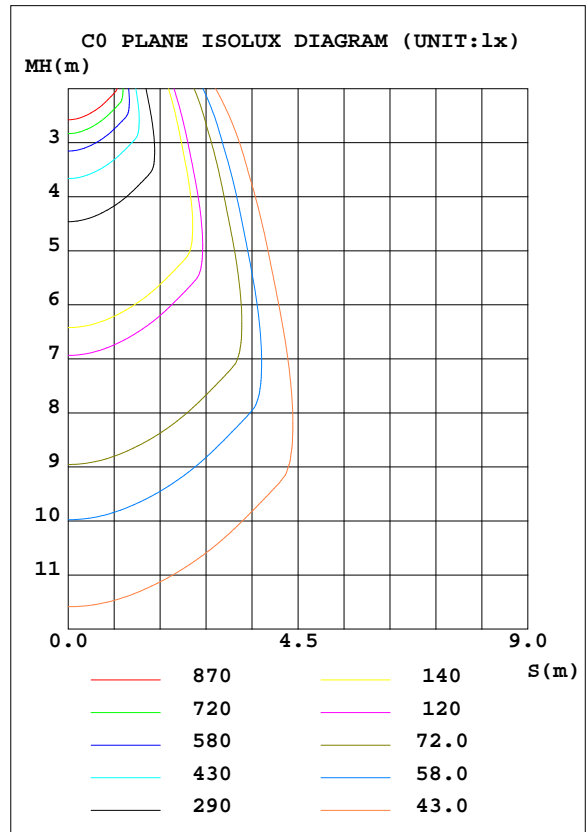


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.4655A P:95.22W PF:0.9300 Lamp Flux:8713.49x1 lm		
NAME: LED-高棚灯	TYPE:LED-高棚灯	WEIGHT:
DIM.:	SPEC.:220V	SERIAL No.:1#
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 91.51 lm/W			
MODEL	LED-高棚灯	I <sub>max</sub> (cd)	5773	S/MH(C0/180)	1.00
NOMINAL POWER(W)	100	LOR(%)	100.0	S/MH(C90/270)	1.03
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	8713.5	η UP, DN(C0-180)	0.0, 49.2
NOMINAL FLUX(lm)	8713.49	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 50.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	219.9	η down(%)	100.0	CIBSE SHR MAX	1.05

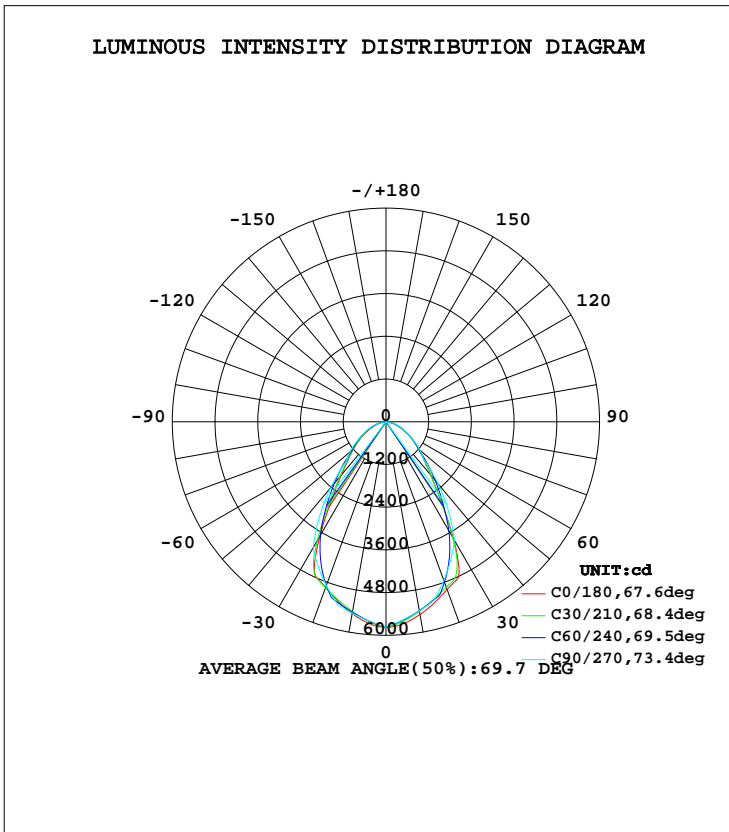


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: TAN TAO  
 Test Date: 2015-07-25

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.275  
 Humidity: 65.0%  
 Test Distance: 6.020m [K=1.0000]  
 Remarks: LED-高棚灯 100W 5000K 1#

AAI Figure

Test:U:220.0V I:0.4655A P:95.22W PF:0.9300 Lamp Flux:8713.49x1 lm		
NAME: LED-高棚灯	TYPE:LED-高棚灯	WEIGHT:
DIM.:	SPEC.:220V	SERIAL No.:1#
MFR.:	SUR.:	PROTECTION ANGLE:

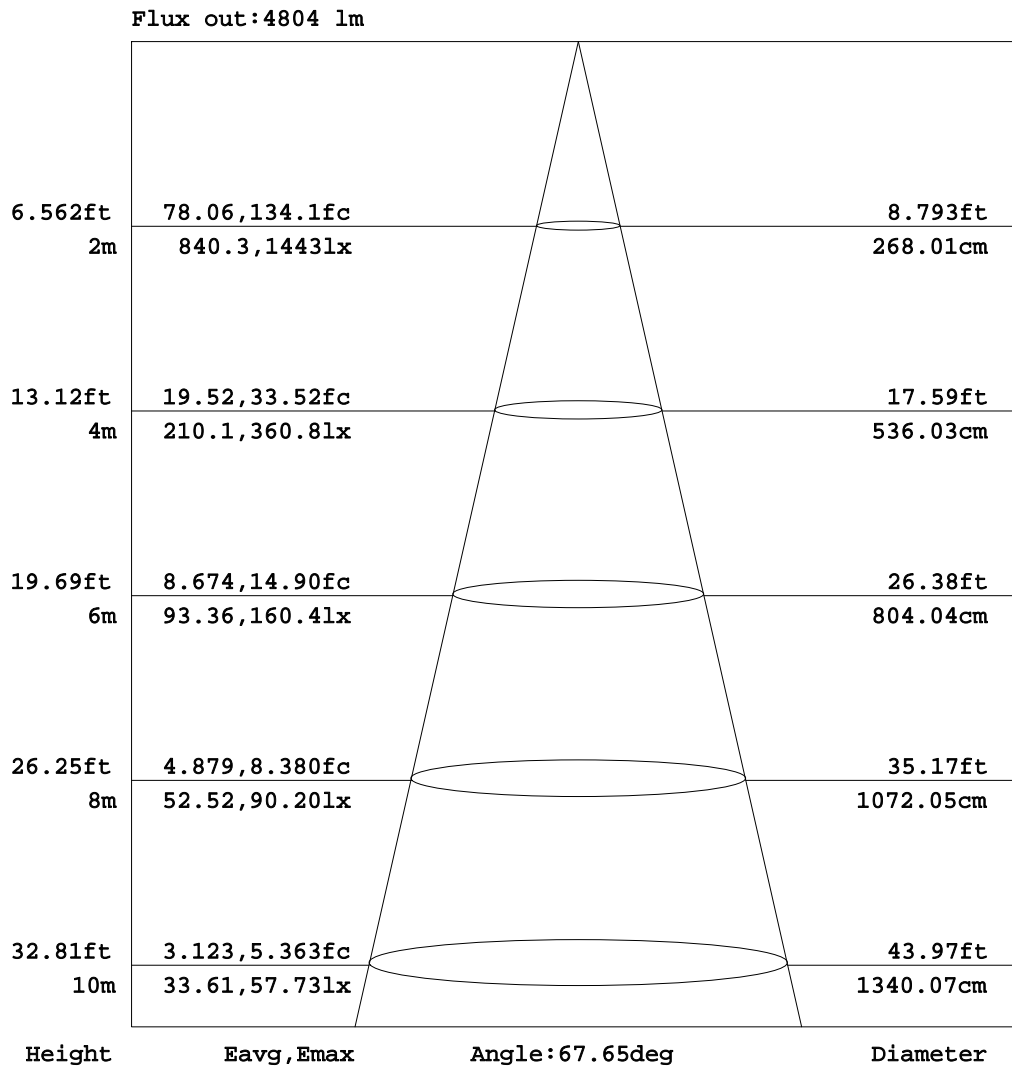

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:TAN TAO  
 Test Date:2015-07-25

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.275  
 Humidity:65.0%  
 Test Distance:6.020m [K=1.0000]  
 Remarks: LED-高棚灯 100W 5000K 1#